

DWG.NO.

MARK

DATE

REVISION

REASON

SIGNATURE

4- $\phi 9$  관통  
PCD130

115

A5°

10 $^{+0}_{-0.03}$

$\phi 35^{+0}_{-0.1}$

0.02 B

A

$\phi 110^{+0}_{-0.03}$

$\phi 40$

$\phi 32^{+0}_{-0.21}$

267

201

12

64

52

40

5

M12 TAP DP20

43MAX

4

$\phi 161.5$




$\phi 70^{+0.025}_{-0.008}$

$\phi 19^{+0.021}_{-0}$

0.02 B

4-M8 TAP DP20  
PCD145

80

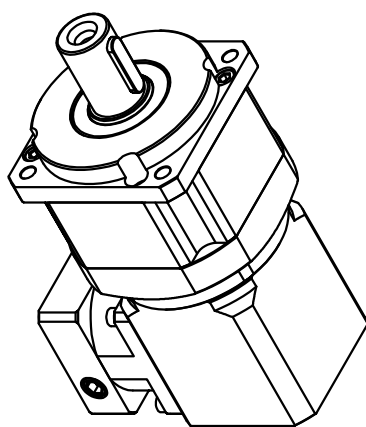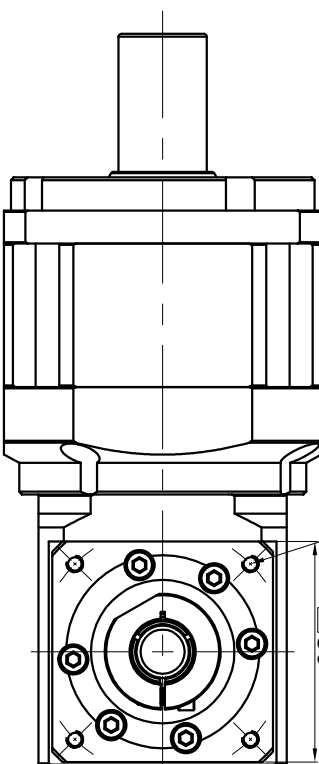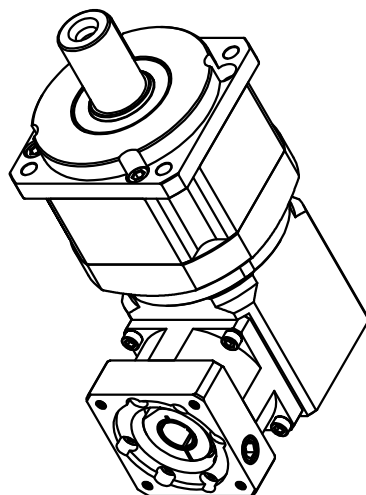

1. MODEL : BA 115-2단 (750w)  
2. Reducer specification

Ratio	Backlash Max (arc-min)	Out Torque(N.m) Rate Peak	Rate input speed Max. (r.p.m)	Peak input speed Max. (r.p.m)	Force (N) Radial Thrust	Weight (kg)
15~100	$L \leq 8, S \leq 15$	-	3,000	5,000	6,500 3,250	

3. Application of Motor

Output Capacity(W)	Maker	Model	Rate torque (N.m)	Peak torque (N.m)

NO.	DESCRIPTIONS	SIZE	MATL	QTY	WEIGHT (kg)	REMARKS
CUSTOMER	STANDARD					
TITLE	BA 115-2단	SCALE	N/S	PROJECTION		
DRAWN	CHKD	APPROVED	REF.NO.	REV. NO.		
S/K	Chung			0		

브라토(주)  
BRATO  
Motion & Control DRIVES

6

5

4

3

2

1